



Eco-Solar Home Tour 2020

Saturday 13 June, 10 am to 4:30 pm

Airdrie NNZ Home

4 Elements

www.4Elements.eco



Calgary



innotech
windows + doors



SkyFireEnergy
Solar Energy Systems

SOLAR
CLUB

SIMPLE SOLAR

Tour Day: Saturday 13 June

Address: Airdrie

Hosts: Homeowners

Parking: On street

Energide Rating: 48 GJ/yr

Summary points why people need to see your home

- 10.5 kW solar array
- Energy efficient home
- Electric car




What will people see and learn about at your home?

- Solar panels produce all the electricity needs of the house & car
- Car plugged in in the Garage
- Heat-Pump hot water tank
- HRV
- Triple Glazed

Windows

- Double Cell Honeycomb Blinds
- Rain Barrel

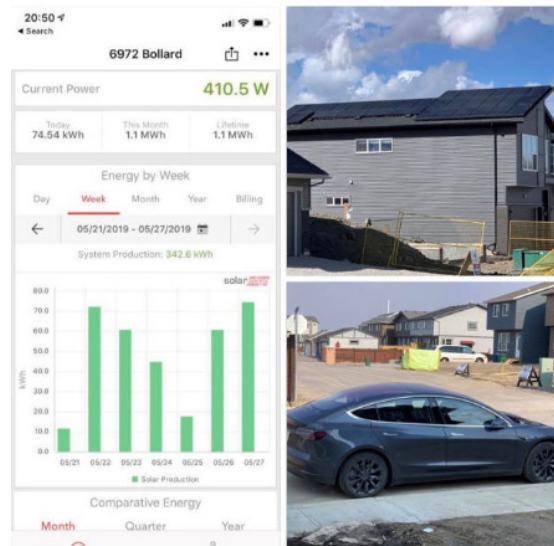



Eco-Solar Home Tour 2020

Airdrie NNZ Home


Why is this home on the tour?

The house is 'Near Zero' with a 10.5 KW solar array producing 13,000 KWH / Year. (Enough to power the house and electric car for 50,000 KM / year. The house was built by Excel Homes under the 'Built Green' program, with a high level of insulation & airtightness. We added a heat-pump pre-heat hot water tank to utilize the solar and minimize gas usage. Honeycomb cellular blinds double the insulation value of the triple glazed windows (R3 + R3). We are super passionate about energy efficiency & green buildings. Keen to show what's possible with adding solar to a new build.



What features save on energy costs?

- 10.5 KW Solar Array (13,000 KWH / year)
- R60 Attic insulation
- R20 Walls
- Basement underslab insulation R16
- HRV & 1.3 Air Changes per Hour Airtightness
- Triple Glazed Windows (R3)
- Honeycomb Double Cellular Blinds (R3)
- LED Lights
- Energy Star Appliances

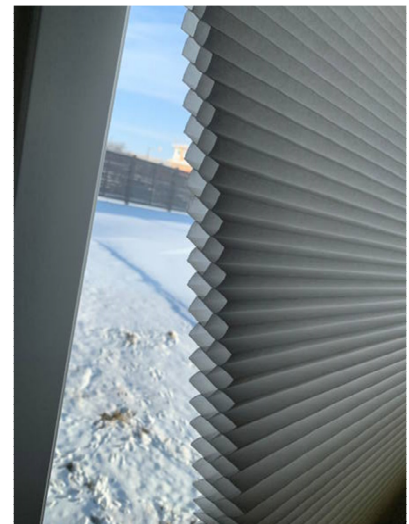

What features save on water costs?

- Low Flow Toilets (3 LPF)
- Low Flow Shower Heads
- Rain Barrel
- Heat-Pump Hot Water Tank

Other features

- Electric car
- Electric car plug in garage

